


Tips for Dismounting Your TRUBLUE Auto Belay

REFER TO THE OPERATOR'S MANUAL FOR COMPLETE INSTALLATION, OPERATION AND MAINTENANCE DETAILS.

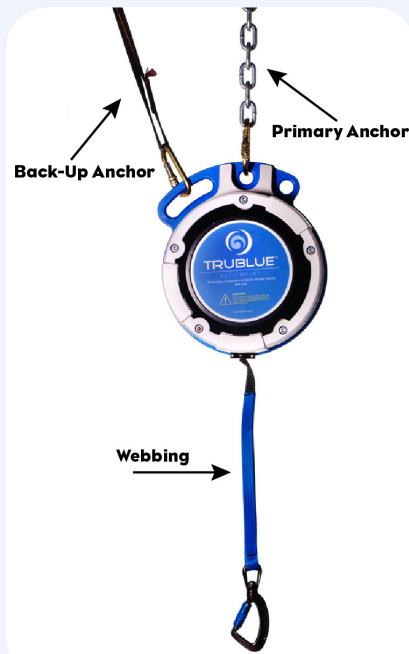

1. Climb up to the top of the wall where your TRUBLUE is located. If you choose to use the auto belay to climb up, make sure that there is a top-rope hanging or take one with you so you have a way to get back down, as you will not be able to use the TRUBLUE to descend. You can also climb up using a partner to belay you instead of using the TRUBLUE.

2. Once you've climbed to the top of the wall be sure to secure yourself safely to the belay bar. Be strategic in positioning yourself so that you're not straining when handling the auto-belay (ideally the auto belay will be slightly below your waist).

3. Clip the TRUBLUE's auto-locking carabiner directly into the back-up anchor.

4. Now you are ready to unclip the TRUBLUE Auto Belay. Unclip the TRUBLUE unit from the back-up anchor first, and then unclip it from the primary anchor. Be careful to maintain

control of the unit while you work. We recommend resting the unit on your thighs; if anchored and positioned well this should be a stable and comfortable stance.

5. Let go of the unit and let the TRUBLUE belay its-self down. Depending on the slope of the wall and its features, you may want to manually guide the unit so it doesn't hit the wall; this can be done using your hands or your lower body for support.

6. Once it has reached the bottom, unclip the carabiner from the anchor and attach it to your harness. Then either hang the rope you brought with you and rappel, or have your partner belay you back to the ground.



Scan the QR code with your mobile device to access a supplementary video about dismounting your TRUBLUE.